

# The Performance of Ethernet Under a Combined Data/Real-Time Traffic

Mokhtar A. Aboelaze  
Dept. of Computer Science  
York University  
[aboelaze@cs.yorku.ca](mailto:aboelaze@cs.yorku.ca)

Ayman Elnaggar  
Dept. of Electrical Engineering  
Sultan Qaboos University  
[ayman@squ.edu.om](mailto:ayman@squ.edu.om)

## Abstract

*In this paper, we investigate the performance of an IEEE802.3 shared-bandwidth hub under a mixed data/real-time traffic load. For the regular data nodes we assume an exponentially distributed packet length with a Poisson arrival. For the video sources, we assumed MPEG encoded video sources at 30 frames per second. We used simulation to study the network performance under the above-mentioned load. We used 2 different protocols, the standard IEEE802.3 and PCSMA, which is suitable for real-time traffic.*

## I Introduction

Ethernet is one of the most successful local area networks ever implemented. It is widely used in many universities, and industries. Ethernet started as a 2.94 Mbps network built at Xerox PARC. The idea caught on with the network community and soon after that a standard was born (IEEE802.3).

Although Ethernet was not designed for real-time traffic (unbounded delay and no delivery guarantee), recently there is an increase in multimedia and real-time traffic crossing LAN boundaries. (Including Ethernet). Many researchers tackled the problem of Ethernet and real-time audio or video transmission, most of them concentrated on 10Mbps Ethernet. Audio streams combined with non-bursty data is discussed in [1]. Video and data were simulated on a 10Mbps Ethernet in [2] and [3]. CBR Video and data were studied in [4] and [5].

In this paper we consider 100Base-TX shared bandwidth Ethernet and we study its performance under a combined data/real-time traffic, we also investigate techniques to improve the network performance (especially for real-time traffic).

The organization of this paper is as follows. In section II, we discuss our simulation methodology and PCSMA [6]. In section III we present our simulation results for CSMA and PCSMA

## II Simulation methodology


We used a CSIM simulator [8] to simulate a half-duplex shared bandwidth 100Mbps IEEE802.3u Ethernet. In our simulation we assumed a 40 stations connected to a single hub (half-duplex hub). Each station is transmitting either regular data Or MPEG coded video. For data we assumed a Poisson arrival with exponential packet length. For video sources we used the model developed in [7].

We also considered a protocol called PCSMA that was proposed in [6]. PCSMA was proposed for a factory automation environment to guarantee delivery of real-time traffic. PCSMA divides the transmission into real-time and regular transmission. For real-time transmission it adds a long preamble and does not check for collision during the preamble. The idea that, if a real-time and regular transmissions started simultaneously, the real-time transmission, with its long preamble, will survive the collision. The regular transmission detects the collision and stops while the real-time transmission continues successfully. Of course two real-time transmissions may collide, abort, and try later. We didn't simulate the reservation mechanism proposed in [6].

## III Simulation Results


We ran our simulation for 30 seconds. We found that this time is more than sufficient in order to reach steady state conditions. We calculated the average delay for both data packets and video frames, we also calculated the number of video frames that was discarded because the new frame was generated while the previous one is still waiting to be transmitted (we call this missed frames). Figure 1 shows the delay vs. utilization for video frames (1v, 5v, and 10v means one, five and 10 video sources among the 40 nodes). While Figure 2 shows the same thing for PCSMA. Notice the huge improvement of PCSMA over CSMA/CD. Although that is on the expense of data packets delay, which is not shown here

Figures 3 and 4 shows the percentage of lost video frames for both CSMA/CD and PCSMA. We

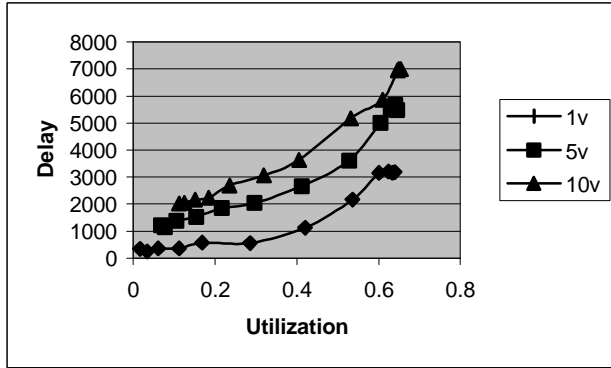


**Figure 1 Delay vs. utilization for video frames (CSMA)**

also notice that PCSMA has a much better performance although it is very sensitive to variations in utilization.

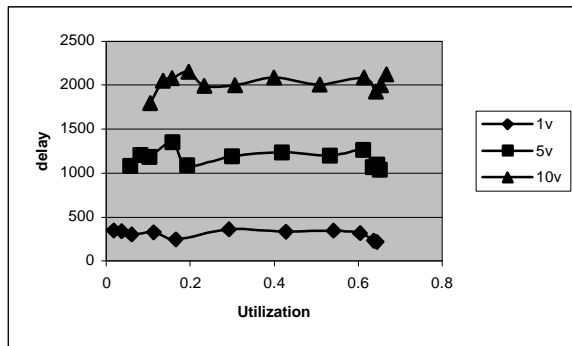


**Figure 3 Delay vs. utilization for video frames (PCSMA)**

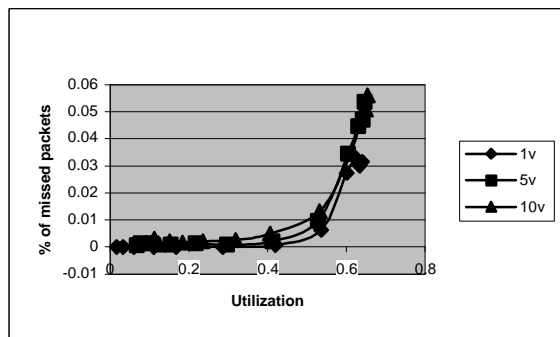

**Figure 4 Percentage of missed frames vs. utilization (CSMA)**

## References

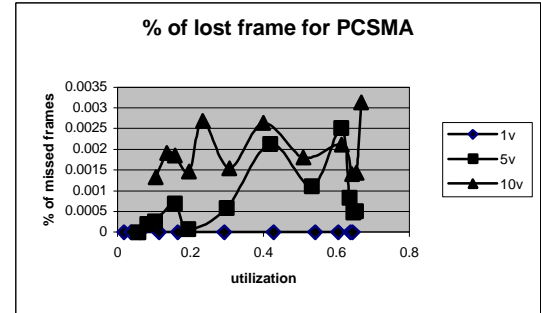

**Figure 6 Percentage of missed frames vs. utilization (PCSMA)**

1. T. A. Gonsalves and F. A. Tobagi, "Comparative Performance of Voice/Data Local Area Networks" IEEE Journal on Selected Areas in Communications, pp 657-669, June 1989
2. J. Zdepski, K. Josepf, and D. Raychaudhuri, "Packet Transport of VBR Interframe DCT Compressed digital video on a CSMA/CD LAN", in Proceedings of the Conference on Global Communication (GLOBECOM), pp 886-892 Dec . 1989
3. E. Edwards and M. Schulz, "Performance of VBR Packet Video Communications on an Ethernet LAN: A Trace Driven Simulation Study", in Proceedings of the 1994 IEEE 13th Ann. International Conference on Computers and Communications, pp 427-433 Phoenix AZ, Apr. 1994
4. A. Desimone, R. Nagarajan, and Y. Wang, "Desktop and Network Performance Issues in Multimedia Conferencing and Collaboration" Tech. Rep. AT&T Bell Labs, Holmdel, N.J. 1994
5. E. Gay, H. Lin, and L Kiong, "Performance Evaluation of Deploying Full Motion Digital Video in Ethernet", in Proceedings of 1994 IEEE Region 10 Ninth Annual International Conference, pp 754-758, Singapoer, Aug. 1994
6. R. Yavatkar, P. Pai, and R. Finkel, "A Reservation-Based CSMA Protocol For Integrated Manufacturing Networks Technical Report 216/92, Dept. of Computer Science, University of Kentucky.
7. M. Krunch, and S. K. Tripathi "On the Characterization of VBR MPEG streams" in ACM SIGMETRICS'97, Seattle Washington, May 1997
8. H. Schwetman "CSIM18 User's Guide" Mesquite Software Inc. Austin TX, 1998